


CANTILEVER S									
	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg
A	3000	3200	3400	3600	3800	4000	4200	4500	
max. weight gate	325 kg	325 kg	325 kg	350 kg	375 kg	400 kg	425 kg	450 kg	
B	900	960	1020	1080	1140	1200	1260	1350	
C	1440	1500	1560	1620	1680	1740	1800	1890	
D	270	270	270	270	270	270	270	270	

- EASY ASSEMBLY**
- FAST NO WELDING REQUIRED**
- 15 BOLTS 15 RIVET NUTS INCLUDED (*)**
- «C» TRACK SERIAL NO. 100% COMPATIBILITY CARRIAGE TESTED**
- GERMAN STEEL**
- HOT DIPPED GALVANIZED**
- ARROW STRAIGHT «C» TRACK**
- SLOTTED HOLE PUNCHED EVERY 400mm IN TRACK**
- GALVANIZED INTERNAL EDGES**
- MADE IN CZECH REPUBLIC**
- C 2 HIGH QUALITY BEARINGS**
- CARRIAGES CENTER HOLES MILLED NOT LASER CUT**
- MULTI RIVETED SECTIONS**
- JAPANESE ROBOTICS FANUC**
- UNIVERSITY OF TECHNOLOGY – BRNO**
- 37°C TESTED & PROVEN**
- +50°C TESTED & PROVEN**
- NO WELDING REQUIRED**

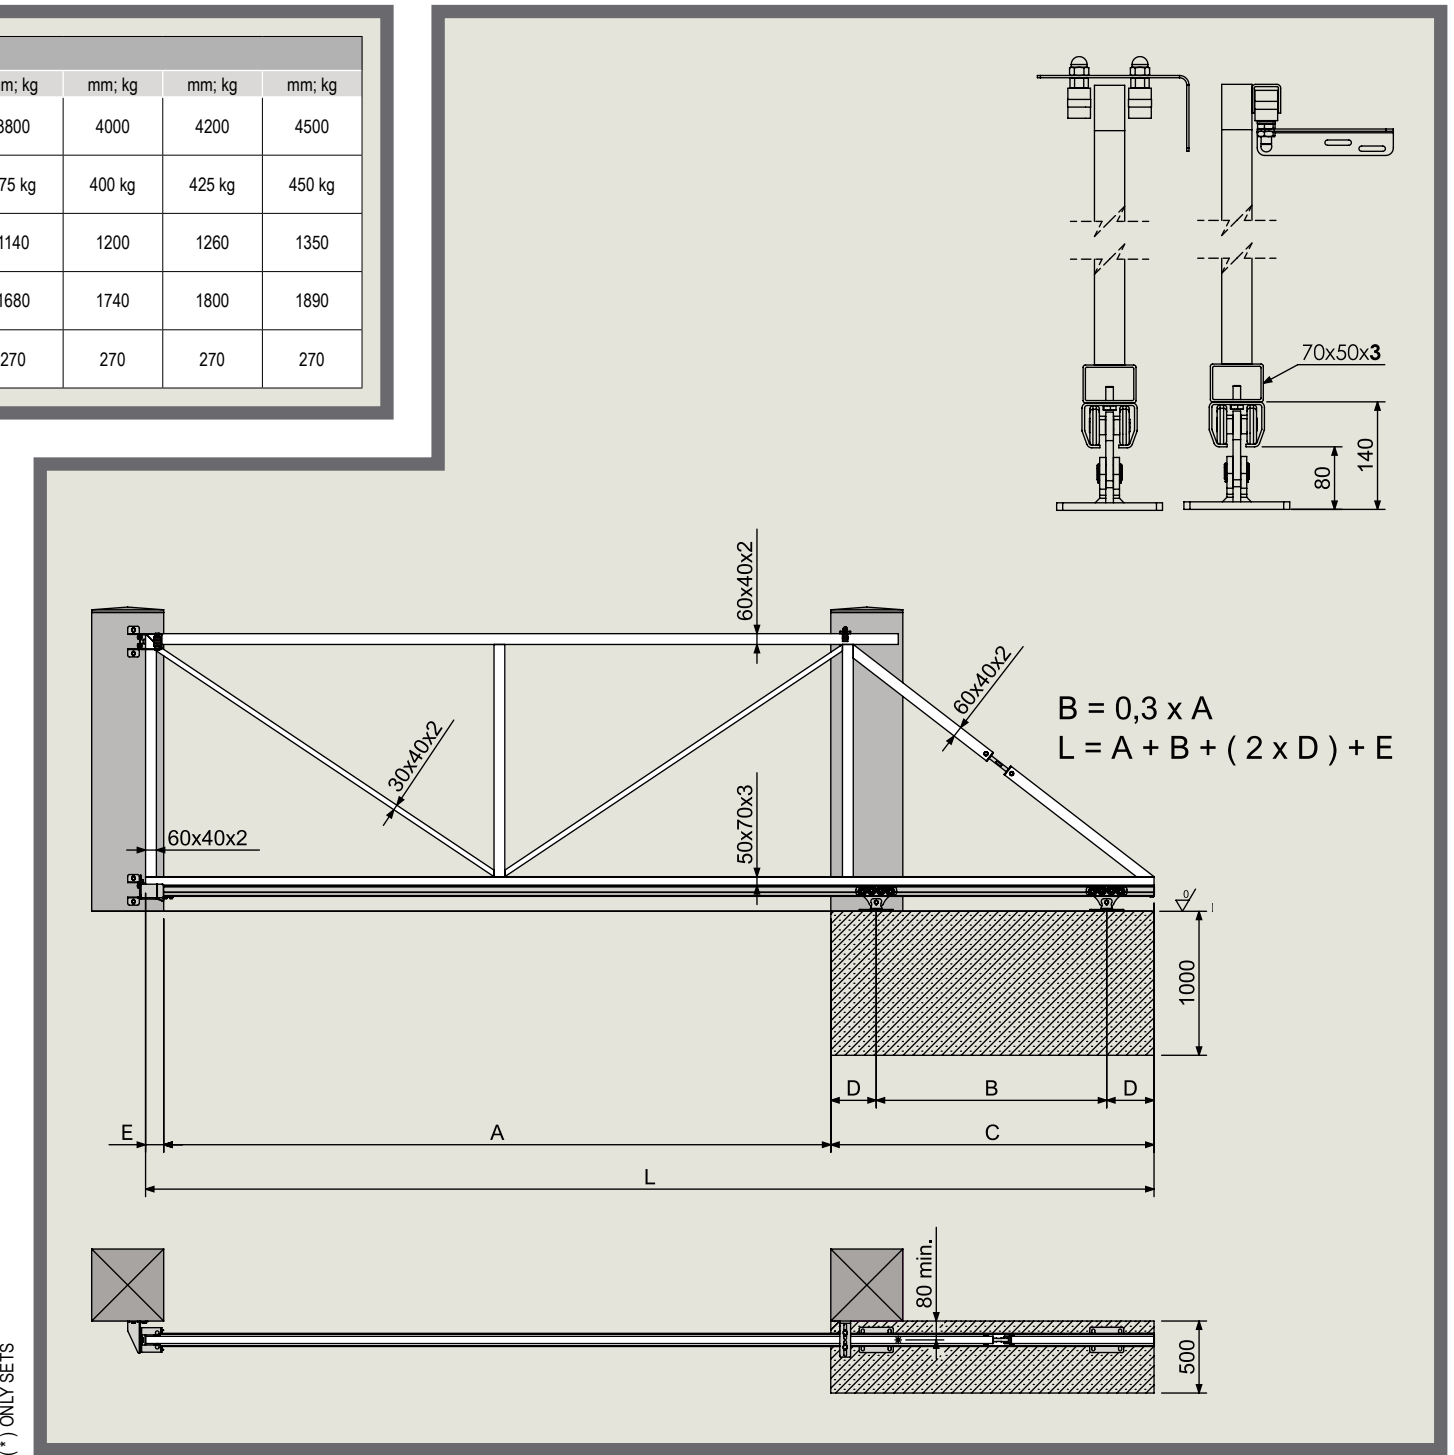

CAIS CANTILEVER S 4.5

CANTILEVER HARDWARE